



F50 CN15W-PS65 SCR



TOOL- FEATURES

- Suitable for nails & SCRAIL®
- Full sequential actuation
- Tool-free depth of drive adjustment

SCRAIL®

- Twice as fast as collated screws
- Eight times faster than bulk screws
- Can be used for almost all screw applications
- Easily installed, quickly removed
- Dramatically increased holding power versus nails



CONTACT & SERVICE

Our sales team
is available at:

P +1 800 239 8665
sales.us@beck-fastening.com
www.beck-fastening.com

DESCRIPTION

More flexibility is not possible. The new FASCO® F50 CN15W-PS 65 SCR nailer processes not only 15° plastic sheet coil nails and 15° wire coil nails, but also 15° wire coil SCRAIL® and 15° plastic sheet coil SCRAIL®. This makes the tool perfect for a variety of applications such as siding, roof joists or deck and fence construction. But it is not only the versatility that makes the nailer an ideal helper, but also the comfortable handling thanks to its light weight, optimal balance and rubber comfort grip. Moreover, with the help of the fully pneumatic feeding and the positioning system, the nails and SCRAIL® can be placed quite precisely. Another plus: an adjustable exhaust and a removable no mar tip to avoid marks in the wood.

F50 CN15W-PS65 SCR

APPLICATIONS

- Siding
- Fencing
- Subflooring
- Decking
- Roof joists
- Garden furniture
- Boxes and crates

HANDLING

1. Load fastener from the top into the magazine
2. Connect air supply
3. Avoid a dry or dirty tool by lubricating respectively cleaning regularly

TOOL CHARACTERISTICS

Height	Width
320 mm	130 mm
12.56 inch	5.11 inch
Length	Weight
280 mm	2.68 kg
11.02 inch	5.99 lbs

Pressure

5 - 8 bar | 70 - 120 psi

Air consumption per shot

1.48 L. | 0.053 SCF

Performance at 90 psi | 6.2 bar
(0.62 MPa)

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 96.70 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 88.70 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

3.34 m/s²

ACTUATION & LOADING

Actuation System:

Full Sequential Actuation

Loading: Coil

VARIATIONS

F44AC CN15W-PS65 SCR

F60 CN15W-PS90 SCR



15°




15°

FASTENER DATA NAILS

Diameter	2.3 - 2.8 mm 0.091 - 0.110"
Length	25 - 65 mm 1 - 2 1/2"
Capacity	200 - 400
Nail Type	15° Plastic Sheet Coil Nails, 15° Wire Coil Nails

FASTENER DATA SCRAIL®

Diameter	2.5 - 3.4 mm 0.098 - 0.134"
Length	30 - 57 mm 1 3/16 - 2 1/4"
Capacity	200 - 300
SCRAIL® Type	15° Wire Coil SCRAIL®, 15° Plastic Sheet Coil SCRAIL®
Drive Type	phillips® pozi (pozidrive®) torx® versa

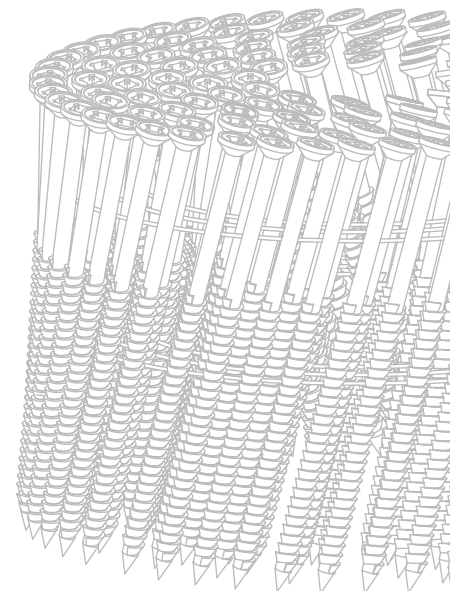

Changes and errors excepted. All rights reserved. FASCO® and SCRAIL® are registered trademarks of the RAIMUND BECK KG.

Torx®, Phillips®, Pozi (Pozidrive®) are all trademarks of their respective owners.

VERSION
11/2022 US